




## TECHNICAL SPECIFICATION AIR WALKER-:


S.N O	DESCRIPTION	REQUIRED SPECIFICATIONS	YES/NO
1	LxBxH	MIN.900X300X1330	
2	MAIN FRAME	MIN.80NB GI-PIPE	
3	BOTTOM SUPPORT PLATE	MIN.250X10mm	
4	REST OF MAIN FRAME	MIN.25NB GI-PIPE	
5	LEG FRAME	MIN.32NB GI-PIPE	
6	BUSH	FROM 60mm X 3mm THICK SEAMLESS PIPE	
7	FOUNDATION	MIN.80NB GI-PIPE, 25X25X3 MS ANGLE, 40X20 MS SQUARE PIPE	
8	PLASTIC PART	LLDPE	
9	PINS	MIN.FROM 25mm SOLID BAR	
10	BEARING	6205	
11	NUT & BOLTS	SS-304	
12	POWDER COATING	MIN.80-100 MICRON	
14	Delivery and Installation	Belbari Municipality WARD 1-11 Belbari ,Morang	
			
<b>RATE WITH VAT:</b>			

  
 गणेश्वरी नगरपालिका  
 प्रमुख प्रशासकिय अधिकारी

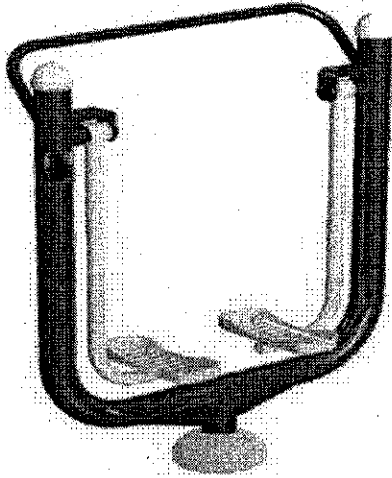



# TECHNICAL SPECIFICATION DOUBLE TWISTER STANDING-:

S.NO	DESCRIPTION	REQUIRED SPECIFICATIONS	Yes/No
1	LxBxH	MIN.1680X700X1270	
2	MAIN FRAME	MIN.100NB GI-PIPE	
3	BOTTOM SUPPORT PLATE	MIN.250X10mm	
4	REST OF MAIN FRAME	25NB GI-PIPE	
5	TWISTER FRAME	MIN.32NB& 50NB GI-PIPE	
6	TWISTER PLATE	MIN.300X8mm THICK	
7	BUSH	MIN.FROM 70mm X 3mm THICK SEAMLESS PIPE	
8	FOUNDATION	MIN.80NB GI-PIPE, 25X25X3 MS ANGLE, 40X20 MS SQUARE PIPE	
9	PLASTIC PART	LLDPE	
10	PINS	FROM 35mm SOLID BAR	
11	BEARING	6007	
12	NUT & BOLTS	SS-304	
13	POWDER COATING	MIN.80-100 MICRON	
14	Delivery and Installation	Belbari Municipality Office Belbari ,Morang	

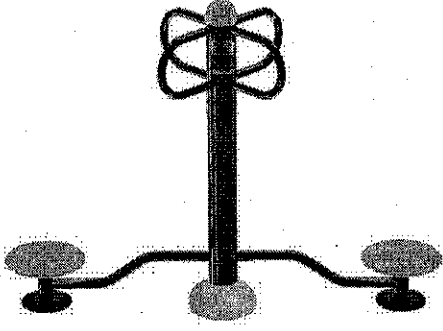


<b>RATE WITH VAT:</b>	
-----------------------	--



  
**मोरोङ नगरपालिका**  
**सह प्रशासकीय अधिकारी**

# TECHNICAL SPECIFICATION TAICHI SPINNER (2in1)-:

S.NO	DESCRIPTION	REQUIRED SPECIFICATIONS	Yes/No
1	LxBxH	MIN.1300X600X1270	
2	MAIN FRAME	MIN.100NB GI-PIPE	
3	BOTTOM SUPPORT PLATE	MIN.250X10mm	
4	REST OF MAIN FRAME	MIN. 32NB GI-PIPE	
5	RING FRAME	25NB GI-PIPE	
6	BUSH	MIN.FROM 60mm X 3mm THICK SEAMLESS PIPE	
7	FOUNDATION	8 MIN.0NB GI-PIPE, 25X25X3 MS ANGLE, 40X20 MS SQUARE PIPE	
8	PLASTIC PART	LLDPE	
9	PINS	MIN.FROM 25mm & 12mm SOLID BAR	
10	BEARING	6205	
11	NUT & BOLTS	SS-304	
12	POWDER COATING	MIN.80-100 MICRON	
13	Delivery and Installation	Belbari Municipality Office Belbari ,Morang	

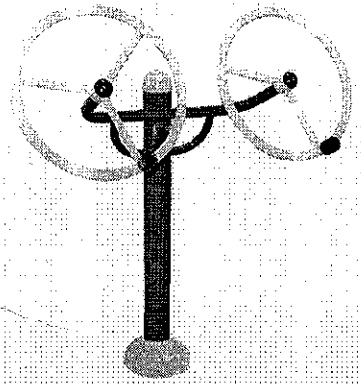

**RATE WITH VAT:**


# TECHNICAL SPECIFICATION PULL-UP-BAR-:



7/1  
 वा  
 बेलबारी नगरपालिका  
 प्रमुख प्रशासकीय अधिकारी

# TECHNICAL SPECIFICATION PULL-UP-BAR-:

S.NO	DESCRIPTION	REQUIRED SPECIFICATIONS	Yes/No
1	LxBxH	MIN.1700X950X1900	
2	MAIN FRAME	MIN.50NB GI-PIPE	
3	REST OF MAIN FRAME	MIN.25NB & 32NB GI-PIPE	
4	FOUNDATION	MADE TO BE GROUTED	
5	POWDER COATING	MIN.80-100 MICRON	
6	Delivery and Installation	Belbari Municipality Office Belbari ,Morang	

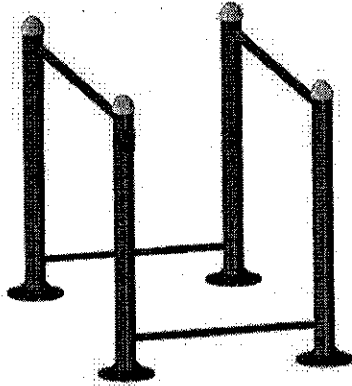

<b>RATE WITH VAT:</b>	
-----------------------	--




*[Signature]*  
12/12/21


**गणेशराज कार्की**  
प्रमुख प्रशासकीय अधिकृत

# TECHNICAL SPECIFICATION HORSE RIDER-:

S.NO	DESCRIPTION	REQUIRED SPECIFICATIONS	Yes/No
1	LxBxH	MIN.1150X600X1000	
2	MAIN FRAME	MIN.100NB GI-PIPE	
3	BOTTOM SUPPORT PLATE	MIN.250X10mm	
4	REST OF MAIN FRAME	32NB GI-PIPE	
5	HANDLE FRAME	25NB GI-PIPE	
6	CONNECTING ROD	25NB GI-PIPE	
7	SEAT FRAME	32NB GI-PIPE	
8	SEAT	MIN.3mm THICK GI-SHEET	
9	BUSH	MIN.FROM 60mm X 3mm THICK SEAMLESS PIPE	
10	FOUNDATION	MIN.80NB GI-PIPE, 25X25X3 MS ANGLE, 40X20 MS SQUARE PIPE	
11	PLASTIC PART	LLDPE	
12	PINS	MIN.FROM 17mm SOLID BAR	
13	BEARING	6203	
14	NUT & BOLTS	SS-304	
15	POWDER COATING	MIN.80-100 MICRON	
16	Delivery and Installation	Belbari Municipality Office Belbari ,Morang	

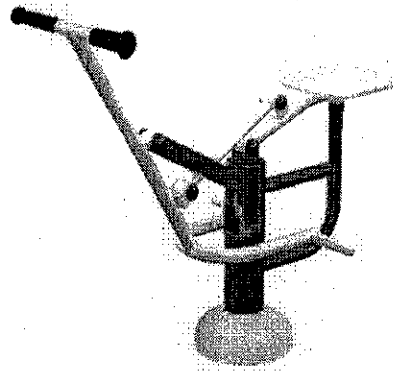


**RATE WITH VAT:**




Handwritten signature and a rectangular stamp. The stamp contains the text 'Belbari Municipality' and 'Morang' in Nepali script, along with the name of the official.

## TECHNICAL SPECIFICATION CHEST PRESS-:

S.NO	DESCRIPTION	REQUIRED SPECIFICATIONS	YES/NO
1	LxBxH	MIN.1400X700X2050	
2	MAIN FRAME	MIN.100NB GI-PIPE	
3	BOTTOM SUPPORT PLATE	MIN.250X10mm	
4	REST OF MAIN FRAME	32NB GI-PIPE	
5	HANDLE FRAME	32NB GI-PIPE	
6	CONNECTING RODS	25NB GI-PIPE	
7	SEAT FRAME	32NB GI-PIPE	
8	SEAT	3mm THICK GI-SHEET	
9	BUSH	MIN.FROM 60mm X 3mm THICK SEAMLESS PIPE	
10	FOUNDATION	MIN.80NB GI-PIPE, 25X25X3 MS ANGLE, 40X20 MS SQUARE PIPE	
11	PLASTIC PART	LLDPE	
12	PINS	FROM 25mm & 17mm SOLID MIN.BAR	
13	BEARING	6205, 6203	
14	NUT & BOLTS	SS-304	
15	POWDER COATING	80-100 MICRON	
16	Delivery and Installation	Belbari Municipality WARD 1-11 Belbari ,Morang	




**RATE WITH VAT:**




*[Handwritten Signature]*  
मोरङ नगरपालिका  
प्रमुख प्रशासकीय अधिकारी

## TECHNICAL SPECIFICATION SIT-UP-BENCH:-


S.NO	DESCRIPTION	REQUIRED SPECIFICATIONS	YES/NO
1	LxBxH	MIN.2044X500X700	
2	MAIN FRAME	MIN.50NB GI-PIPE	
3	REST OF MAIN FRAME	MIN.50NB GI-PIPE	
4	BOARD FRAME	MIN.25NB GI-PIPE	
5	BOARD	MIN.3mm THICK PERFORATED SHEET	
6	FOUNDATION	MACHINE IS MADE TO BE GROUTED	
7	NUT & BOLTS	SS-304	
8	POWDER COATING	MIN.80-100 MICRON	
9	Delivery and Installation	Belbari Municipality WARD 1-11 Belbari ,Morang	

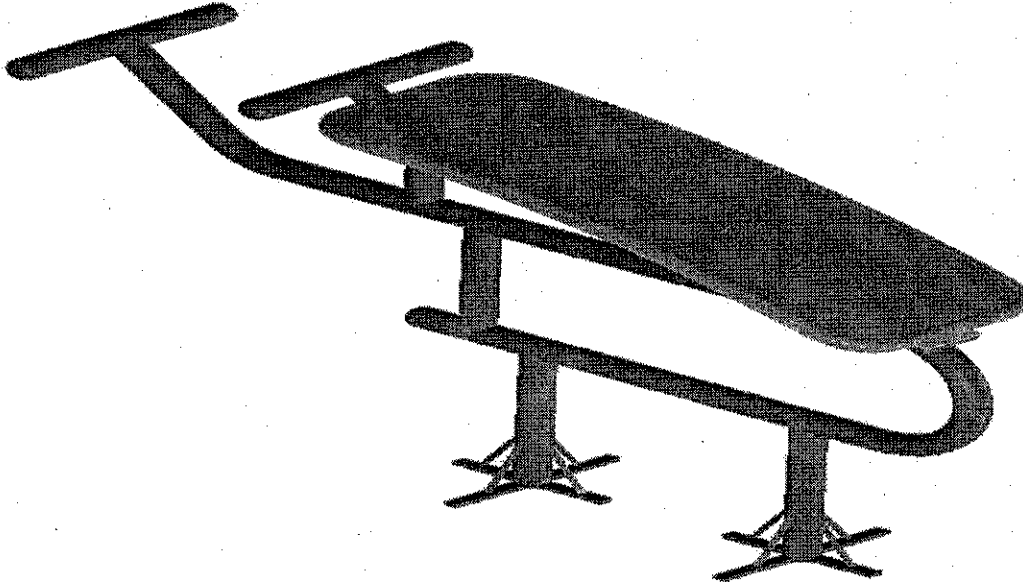


**RATE WITH VAT:**

  
बेलबारी नगरपालिका  
प्रमुख प्रशासकीय अधिकृत

# TECHNICAL SPECIFICATION OF SKY WALKER

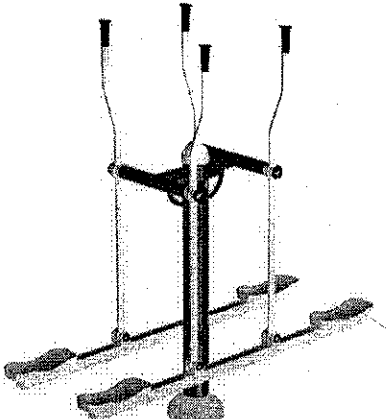S.NO	DESCRIPTION	REQUIRED SPECIFICATIONS	YES/NO
1	LxBxH	MIN.1400X700X2050	
2	MAIN FRAME	MIN.100NB GI-PIPE	
3	BOTTOM SUPPORT PLATE	MIN.250X10mm	
4	REST OF MAIN FRAME	MIN.32NB GI-PIPE	
5	HANDLE FRAME	MIN.25NB GI-PIPE	
6	CONNECTING RODS	25NB GI -PIPE	
7	SEAT FRAME	32NM GI-PIPE	
7	BUSH	MIN.FROM 60mm X 3mm THICK SEAMLESS PIPE	
8	FOUNDATION	MIN.80NB GI-PIPE, 25X25X3 MS ANGLE, 40X20 MS SQUARE PIPE	
9	PLASTIC PART	LLDPE	
10	PINS	FROM 25mm & 17mm SOLID BAR	
11	BEARING	6205, 6203	
12	NUT & BOLTS	SS-304	
13	POWDER COATING	80-100 MICRON	
14	Delivery and Installation	Belbari Municipality WARD 1-11 Belbari ,Morang	
			
<b>RATE WITH VAT:</b>			





*Handwritten signature*

**बेलबारी नगर कार्यपालिका**  
प्रमुख प्रशासकीय अधिकारी




## TECHNICAL SPECIFICATION CROSS TRAINER-:

S.N O	DESCRIPTION	REQUIRED SPECIFICATIONS	YES/NO
1	LxBxH	MIN.1200X500X1620	
2	MAIN FRAME	MIN.80NB GI-PIPE	
3	BOTTOM SUPPORT PLATE	MIN.250X10mm	
4	REST OF MAIN FRAME	MIN.50NB GI-PIPE	
5	HANDLE FRAME	MIN.25NB GI-PIPE	
6	FOOT ROD	MIN.40X40 MS SQUARE PIPE	
7	BUSH	MIN.FROM 60mm X 3mm THICK SEAMLESS PIPE	
8	FOUNDATION	MIN.80NBGI-PIPE, 25X25X3 MS ANGLE, 40X20 MS SQUARE PIPE	
9	PLASTIC PART	LLDPE	
10	PINS	FROM 25mm& 17mm SOLID BAR	
11	BEARING	6205, 6203	
12	NUT & BOLTS	SS-304	
13	POWDER COATING	MIN.80-100 MICRON	
14	Delivery and Installation	Belbari Municipality WARD 1-11 Belbari ,Morang	

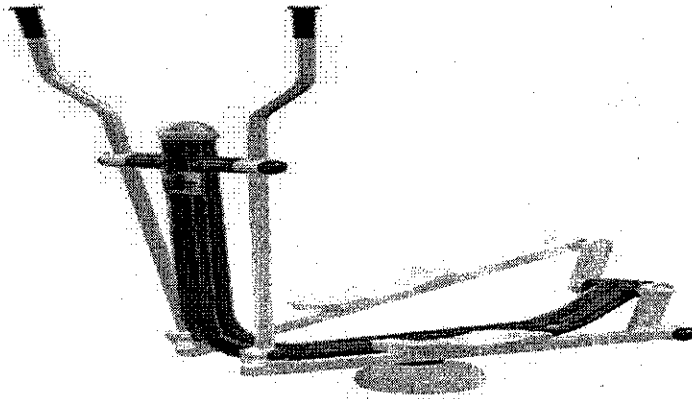


**RATE WITH VAT:**

  
 मधुसूदन प्रशासक  
 मधुसूदन प्रशासक  
 मधुसूदन प्रशासक

## TECHNICAL SPECIFICATION CYCLE-

S.NO	DESCRIPTION	REQUIRED SPECIFICATIONS	YES/NO
1	LxBxH	MIN.800X450X1150	
2	MAIN FRAME	MIN.50NB GI-PIPE	
3	BOTTOM SUPPORT PLATE	MIN.250X10mm	
4	REST OF MAIN FRAME	MIN.25NB GI-PIPE	
5	HANDLE FRAME	20NB GI-PIPE	
6	SEAT	RUBBER PLASTIC	
7	ASSEMBLY	MIN.300X6mm ROUND PLATE	
8	PADDLES	ALLUMINIUM	
9	BUSH	MIN.FROM 60mm X 3mm THICK SEAMLESS PIPE	
10	FOUNDATION	MIN.80NB GI-PIPE, 25X25X3 MS ANGLE, 40X20 MS SQUARE PIPE	
11	PINS	MIN.FROM 25mm SOLID BAR	
12	BEARING	6205	
13	PLASTIC PART	LLDPE	
14	NUT & BOLTS	SS-304	
15	POWDER COATING	MIN.80-100 MICRON	
16	Delivery and Installation	Belbari Municipality WARD 1-11 Belbari ,Morang	

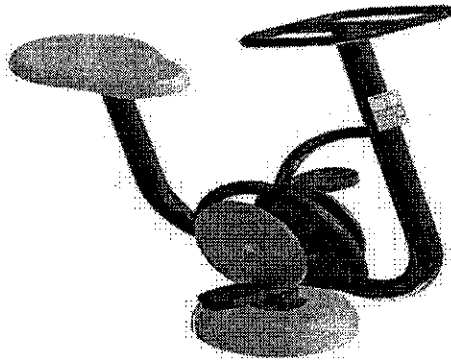


**RATE WITH VAT:**



Handwritten signature and date: 12/11/21  
 Belbari Municipality  
 Morang


# TECHNICAL SPECIFICATION BACK EXTENSION-:

S.NO	DESCRIPTION	REQUIRED SPECIFICATIONS	YES/NO
1	LxBxH	MIN.1060x552x680	
2	MAIN FRAME	MIN.50NB GI-PIPE	
3	BOTTOM SUPPORT PLATE	MIN.250X10mm	
4	REST OF MAIN FRAME	MIN.25NB& 32NB GI-PIPE	
5	SEAT	3mm THICK GI-SHEET	
6	FOUNDATION	MIN.80NB GI-PIPE, 25X25X3 MS ANGLE, 40X20 MS SQUARE PIPE	
7	PLASTIC PART	LLDPE	
8	NUT & BOLTS	SS-304	
9	POWDER COATING	MIN.80-100 MICRON	
10	Delivery and Installation	Belbari Municipality Office Belbari ,Morang	

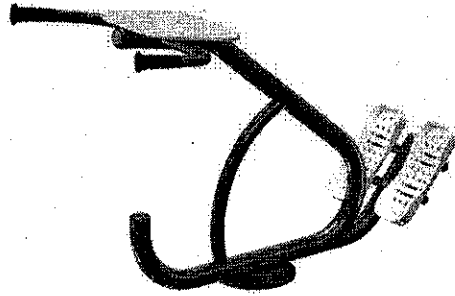

**RATE WITH VAT:**



  
 गणेशराज चौधरी  
 प्रमुख प्रशासकीय अधिकृत